

Yanmar

Air Cooled Diesel Engine Driven Pump



Application ! Irrigation & Gardening
Water Supply to reserver
Pumping Well Water

QP Self priming Centrifugal Diesel Pump-Irrigation Siries

50mm
2
inch

QP207D L48



80mm
3
inch

QP303D L48



80mm
3
inch

QP303D L70



100mm
4
inch

QP402D L70




150mm
6
inch

QP602D L100



Engine	L48	L48	L70	L70	L100
Suction x Discharge (mm)	50 × 50	80 × 80	80 × 80	100 × 100	150 × 150
Max Head (m)	30	30	30	30	18
Max Flow (l/min)	600	900	1000	1400	2500
Dry weight	42	46	53	59	150
Engine Max PS	4.7	4.7	6.5	6.5	9.3

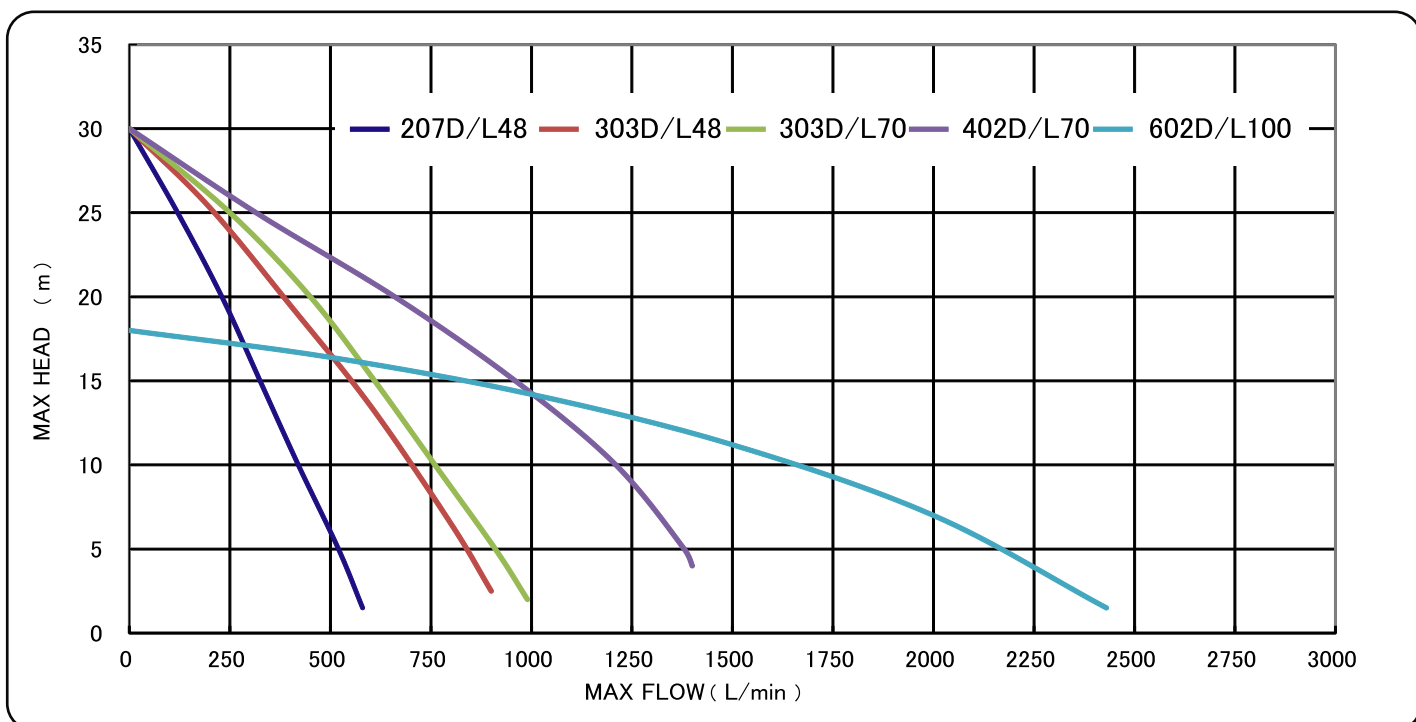

Q048



MATSUSAKA ENGINEERING CO., LTD.

Homepage <http://www.qp-pump.com>

Head office 23, Kanda-Matsunaga cho, Chiyoda ku, Tokyo, Japan

TEL: +81-3-3257-6130 FAX: +81-3-3257-6129

Plant 2155, Nonaka, Taki cho, Taki gun, Mie-pref, Japan

TEL: +81-598-39-3211 FAX: +81-598-39-3844

Distributed by:

