

Yanmar

Air Cooled Diesel Engine Driven Pump



Application ! Irrigation & Gardening
Water Supply to reserver
Pumping Well Water

QP Self priming Centrifugal Diesel Pump-Irrigation Series

50mm
2
inch

QP2D L48



80mm
3
inch

QP303D L48



80mm
3
inch

QP303D L70



100mm
4
inch

QP402D L70



150mm
6
inch

QP602D L100




Specification & Performance

Yanmar Air Cooled Diesel Engine Driven QP Pump



Model	QP-2D	QP-303D	QP-303D	QP-402D	QP-602D
Engine	L48	L48	L70	L70	L100
Suciton x Discharge (mm)	50 × 50	80 × 80	80 × 80	100 × 100	150 × 150
Max Head (m)	30	30	30	30	18
Max Flow (l/min)	600	900	1000	1400	2500
Dry weight	44	46	53	59	150
Engine Max PS	4.6	4.7	6.5	6.5	9.3

*Specification may be changed without prior notice!

Performance Characteristic Curve

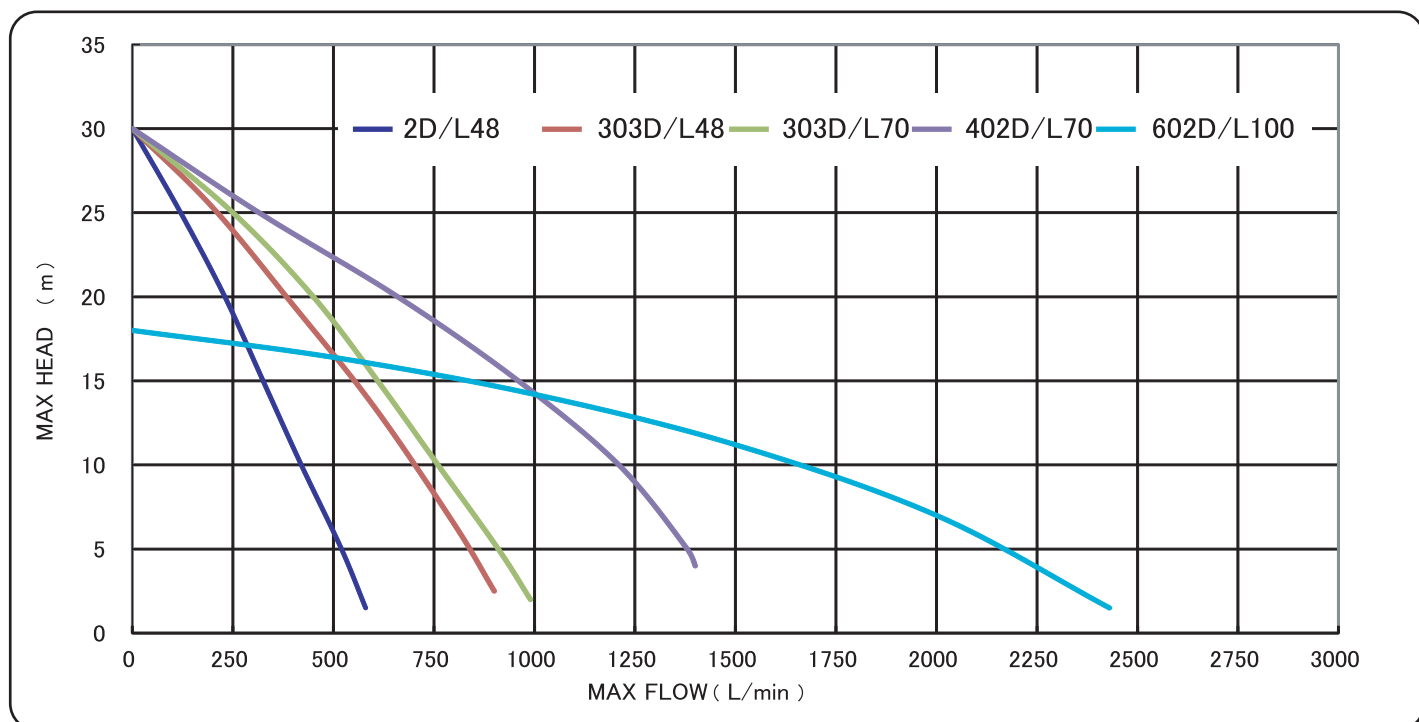

Outer Dimension! A wheel & tyres shown available at option. !



Pump	mm		
	A	B	C
QP-2D L48N	537	478	554
QP-303D L48N	610	420	575
QP-303D L70V	665	445	660
QP-402D L70V	665	445	660
QP-602D L100V	920	685	810



Manufactured by:
MATSUSAKA ENGINEERING CO., LTD.

<http://www.qp-pump.com>

Head 23, Kanda-Matsunaga cho, Chiyoda ku, Tokyo, Japan
Office TEL: +81-3-3257-6130 FAX: +81-3-3257-6129

Plant 2155, Nonaka, Taki cho, Taki gun, Mie-pref, Japan
TEL: +81-598-39-3211 FAX: +81-598-39-3131



Distributed By:

CTG No. WEAYD0912
(2022年5月改訂)