

Yanmar

Air Cooled Diesel Engine Driven

*Push water higher & further
by QP High Pressure Pump*

205SD/L48 **Max Head Max Flow**
【60m • 400l/m】



High&Higher ~ ~ !!



205SLD/L70 **Max Head Max Flow**
【60m • 420l/m】



402SLD/L100 **Max Head Max Flow**
【50m • 1250l/m】



T205SLTD/L100 **Max Head Max Flow**
【90m • 450l/m】



Far&Further ~ ~ !!



305SD/L70 **Max Head Max Flow**
【60m • 450l/m】



Specification [Yanmar Air Cooled Diesel Engine Driven QP High Pressure Pump]

Model	QP-205SD	QP-205SLD	QP-T205SLTD	QP-305SD	QP-402SLD
Engine	L48N	L70V	L100V	L70V	L100V
Suction × Discharge (mm)	50 × 50	50 × 50	50 × 50	80 × 80	100 × 100
Max Head (m)	60	60	90	60	50
Max Flow (L/min)	400	420	450	450	1250
Dry weight (kg)	48	57	101	57	90
Engine Max Output (PS)	4.7	6.5	9.3	6.5	9.3


*Specification may be changed without prior notice!

★High Pressure for Water Transfer & Wash Down

★High Pressure for Spray Irrigation



★High Pressure for Fire Fighting

Pump Performance Curve

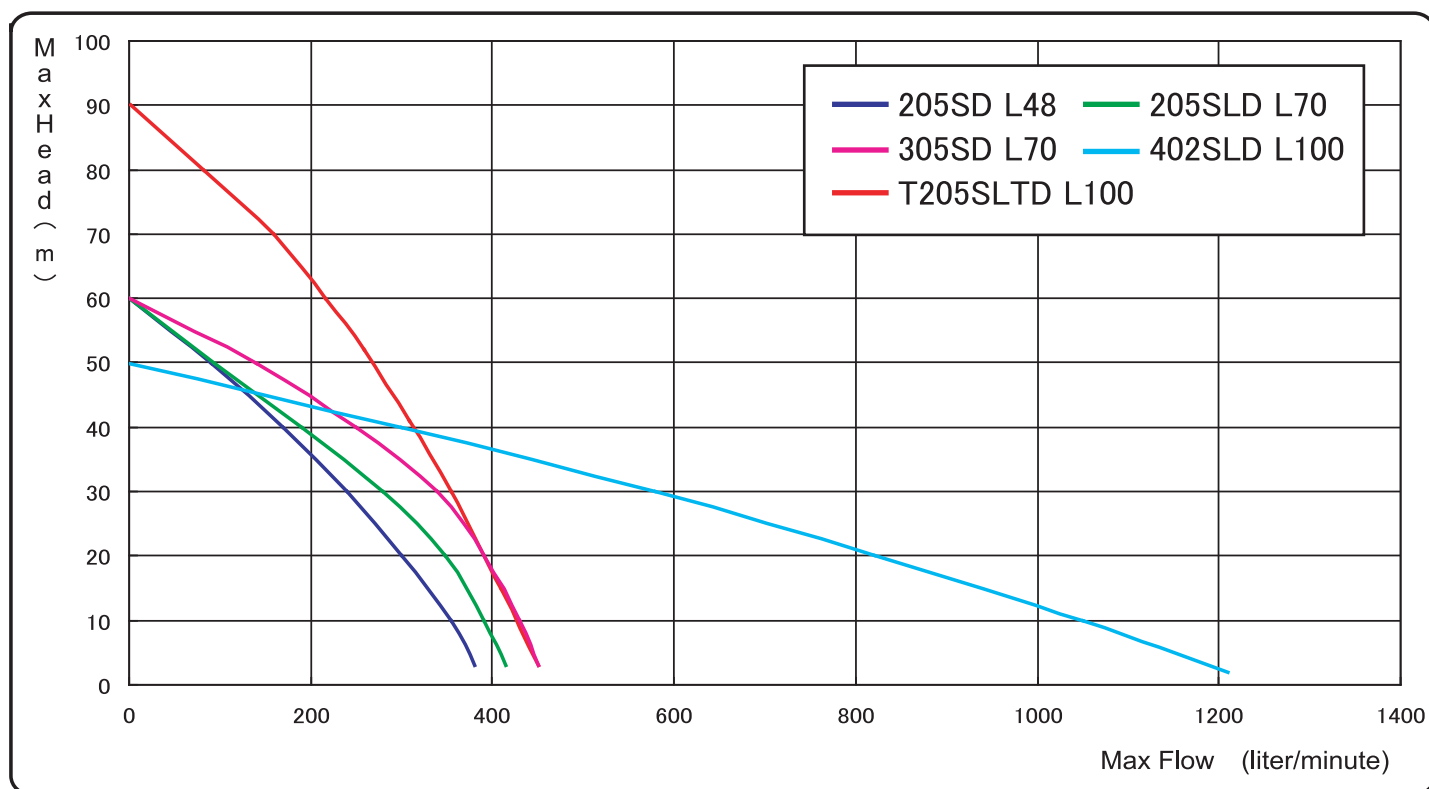

Outer Dimension

A wheel & tires shown available at option.



Pump	mm	A (mm)	B (mm)	C (mm)
QP-205SD L48N		610	420	575
QP-205SLD L70V		665	445	660
QP-T205SLTD L100V		735	610	620
QP-305SD L70V		665	445	660
QP-402SLD L100V		735	610	620



Manufactured by:

MATSUSAKA ENGINEERING CO., LTD.

<http://www.qp-pump.com>

Head 23, Kanda-Matsunaga cho, Chiyoda ku, Tokyo, Japan

Office TEL: +81-3-3257-6130 FAX: +81-3-3257-6129

Plant 2155, Nonaka, Taki cho, Taki gun, Mie-pref, Japan

TEL: +81-598-39-3211 FAX: +81-598-39-3131



Distributed By:

CTG NO.WECYD0909