


QP Pump

NEW! 2" engine driven pump!! 「QP-2」series!!

50mm
2
inch

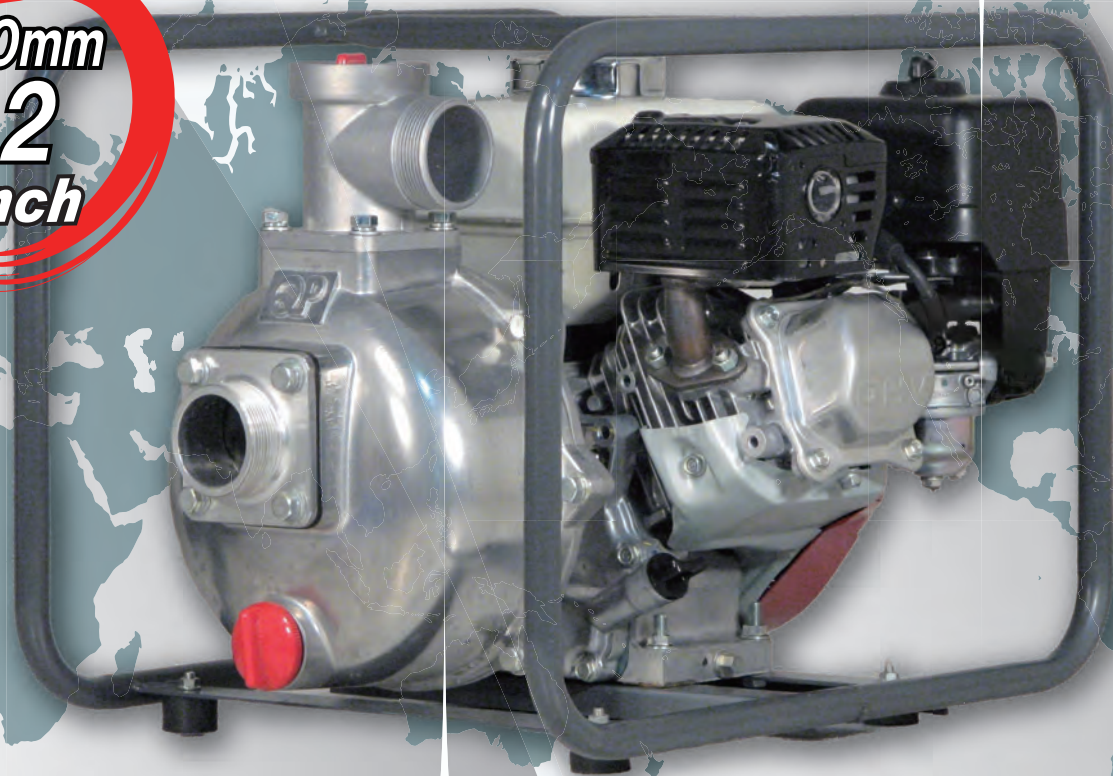

QP-2/GX120

Feature compared with QP-207

- ★Quicker priming.
- ★Removable suction port !
- ★Fasten with 6 bolts provides excellent durability !




Matsusaka
ENGINEERING CO., LTD. JAPAN

Specification



		General purpose	Semi-Trash
Pump Model		QP-2/GX120	QP-2B/GX120
Engine Model		HONDA GX120	HONDA GX120
Inlet x Outlet Dia. (mm)		50×50	50×50
Max.Head (m)		30	30
Max. Capa. (L/min)		600	600
Pipe Dia. [Frame] (mm)		Φ19.1	Φ25.4
Net Weight (kg)		21.5	25
Max. Power (PS)		3.3	3.3
Material of inner parts	Impeller	FC (Cast iron)	FC (Cast iron)
	Volute	ADC (Aluminium die casting)	FC (Cast iron)
	Mechanical Seal	Ceramic × Carbon	SIC × SIC

※These specification may be changed without notice.

Performance Curve

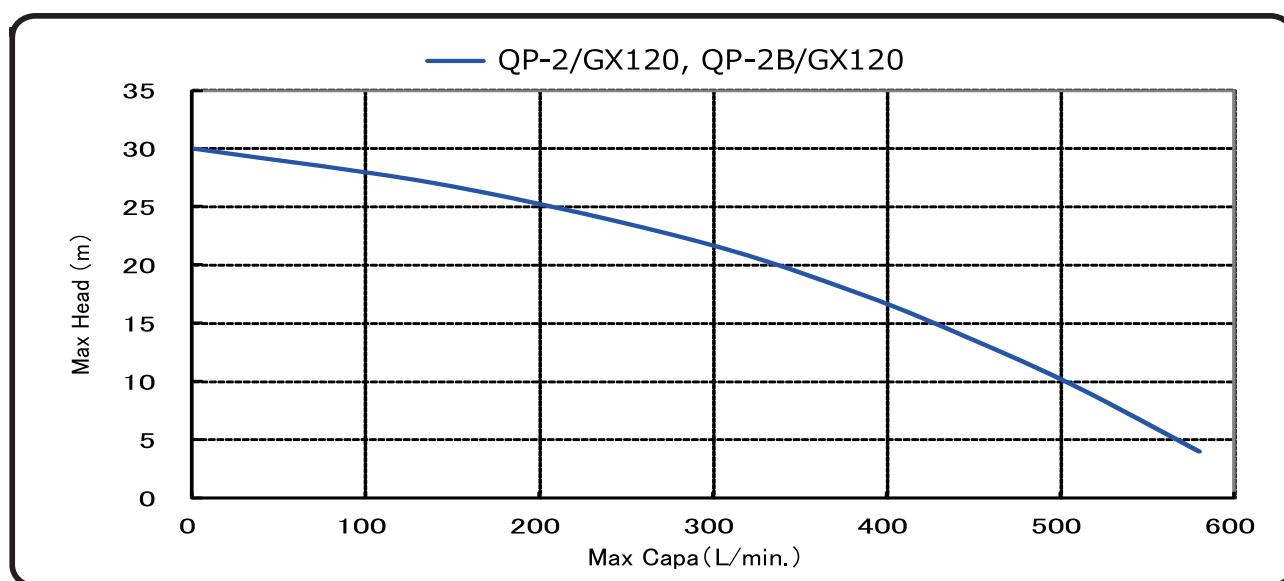

Outer Dimension



Dimension		A (mm)	B (mm)	C (mm)
Model				
QP-2/GX120		477	375	385
QP-2B/GX120		477	375	385



Manufactured by:

MATSUSAKA ENGINEERING CO., LTD.

<http://www.qp-pump.com>

Head 23, Kanda-Matsunaga cho, Chiyoda ku, Tokyo, Japan

Office TEL: +81-3-3257-6130 FAX: +81-3-3257-6129

Plant 2155, Nonaka, Taki cho, Taki gun, Mie-pref, Japan

TEL: +81-598-39-3211 FAX: +81-598-39-3131



Distributed By:

CTG No. WES002012