

Matsusaka

QP-Pump Series for Various Applications

driven by KUBOTA Diesel Engine

High Pressure Pump!

Max. Head 85 m

50mm
2
inch

85m



QP-T205SLTD/OC95

Big Flow for Dewatering!

Max. Capacity 1450 L/min

100mm
4
inch

1450L



QP-402D/OC60

Trash Pump!

Max. Capacity

1100 L/min

80mm
3
inch

1100L



QP-301TD/OC60

Bigger Flow for Dewatering!

Max. Capacity 2200 L/min

150mm
6
inch

2200L



QP-602D/OC95





Specification & Performance


Type	Transfer Pump (Centrifugal)	Big Flow Pump (Dewatering)			High Pressure Pump (Higher & Further)				Trash Pump (Muddy Water Handling)		
Model	QP-303D	QP-402D	QP-602D	QP-205SLD	QP-T205SLTD	QP-402SXD	QP-402SLD	QP-203TD	QP-301TD	QP-40TD	
Engine Type	OC60	OC60	OC95	OC60	OC95	OC95	OC95	OC60	OC60	OC95	
Inlet x Outlet (mm)	80 x 80	100 x 100	150 x 150	50 x 50	50 x 50	100 x 100	100 x 100	50 x 50	80 x 80	100 x 100	
Max. Head (m)	28	28	18	55	85	60	45	24	24	23	
Max. Flow (ℓ/m)	1000	1450	2200	470	420	700	1250	650	1100	1500	
Net Weight (kg)	73	73	166	73	99	94	94	91	91	133	
Engine (PS)	6.0	6.0	9.5	6.0	9.5	9.5	9.5	6.0	6.0	9.5	

*Specification may be changed without prior notice!

Performance Characteristic Curve

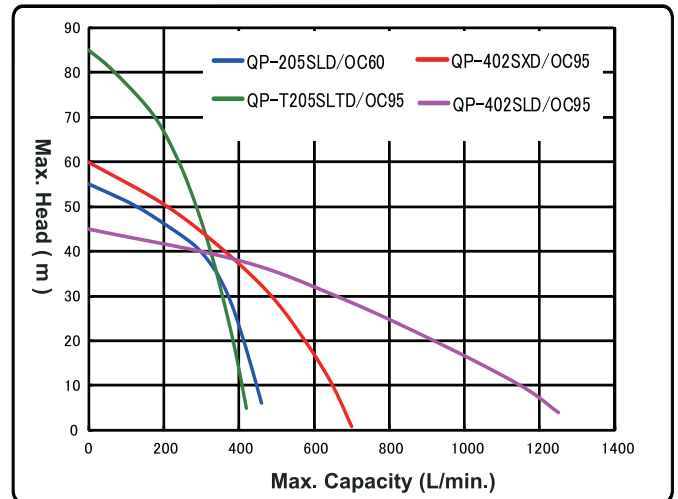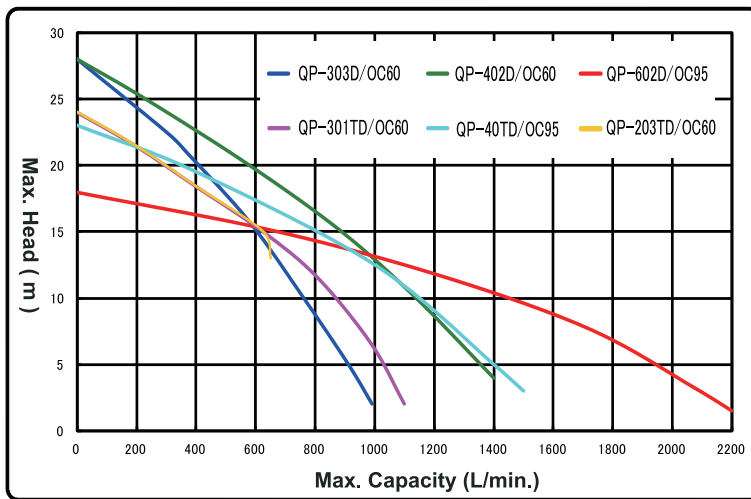

Outer Dimension

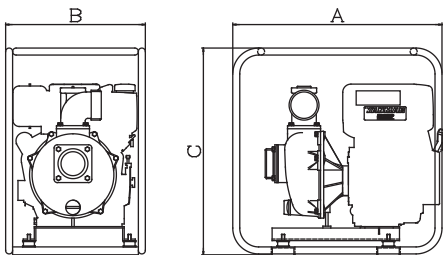

	303D /OC60	402D /OC60	602D /OC95	205SLD /OC60	T205SLTD /OC95	402SXD /OC95	402SLD /OC95	203TD /OC60	301TD /OC60	40TD /OC95
A	649	700	926	649	669	724	724	700	699	757
B	561	597	708	561	611	625	625	597	576	612
C	635	585	775	635	618	650	650	635	653	819

*Specification may be changed without prior notice!

Manufactured by:
MATSUSAKA ENGINEERING CO., LTD.

<http://www.qp-pump.com>

Head 23, Kanda-Matsunaga cho, Chiyoda ku, Tokyo, Japan
Office TEL: +81-3-3257-6130 FAX: +81-3-3257-6129

Plant 2155, Nonaka, Taki cho, Taki gun, Mie-pref, Japan
TEL: +81-598-39-3211 FAX: +81-598-39-3131



Distributed By: